


# Rain VENTS

## DESCRIPTION

The vent is made of galvanized steel sheet or aluminium sheet. The standard design contains a galvanized grating to serve as a protection against the invasion of birds (the grating is made of galvanized steel). The frame depth is 50 mm; up to the dimension of 1000/1000 „C”= 40; for the dimension 1000/1000 and higher „C”= 60 mm.


The dimensions specified as „A” and „B” are in fact by 10 mm smaller than the actual construction opening (in order to enable a smooth fixing). Example: to insert the vent in a pipe of the size 1000/800mm means that the actual „A”/”B” dimensions are 990/790 mm.

The size of the vent can be modified according to the customer’s choice.

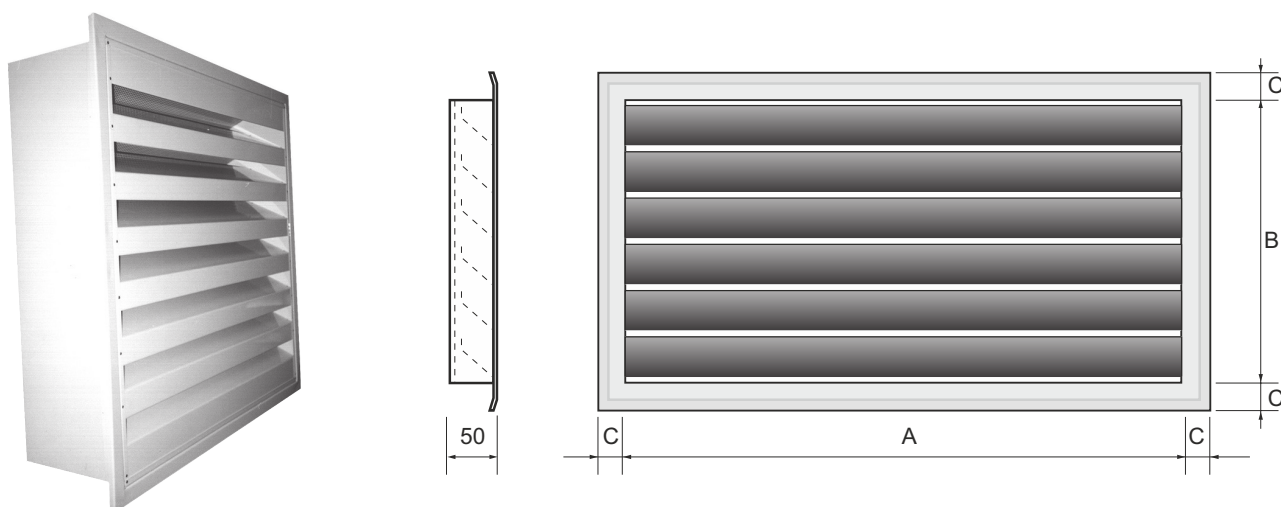


## ORDER KEY

Rain vent

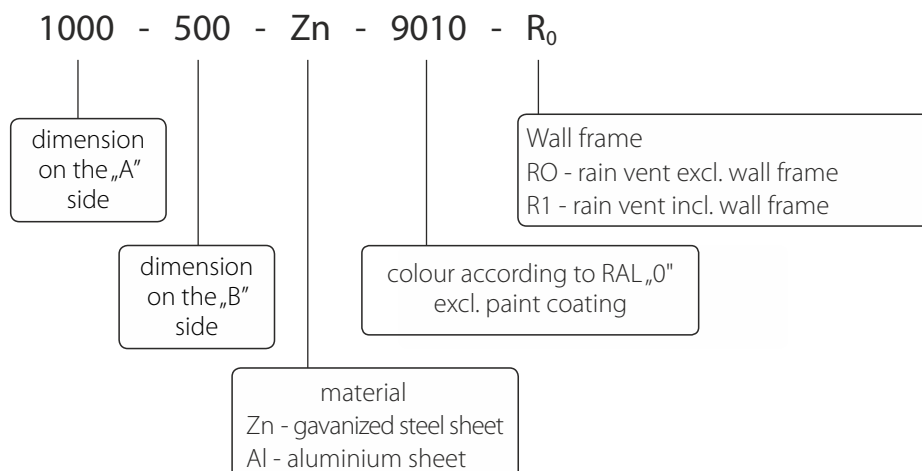


# SPECIFICATION


## TECHNICAL DATA FOR THE DISCHARGE SIDE

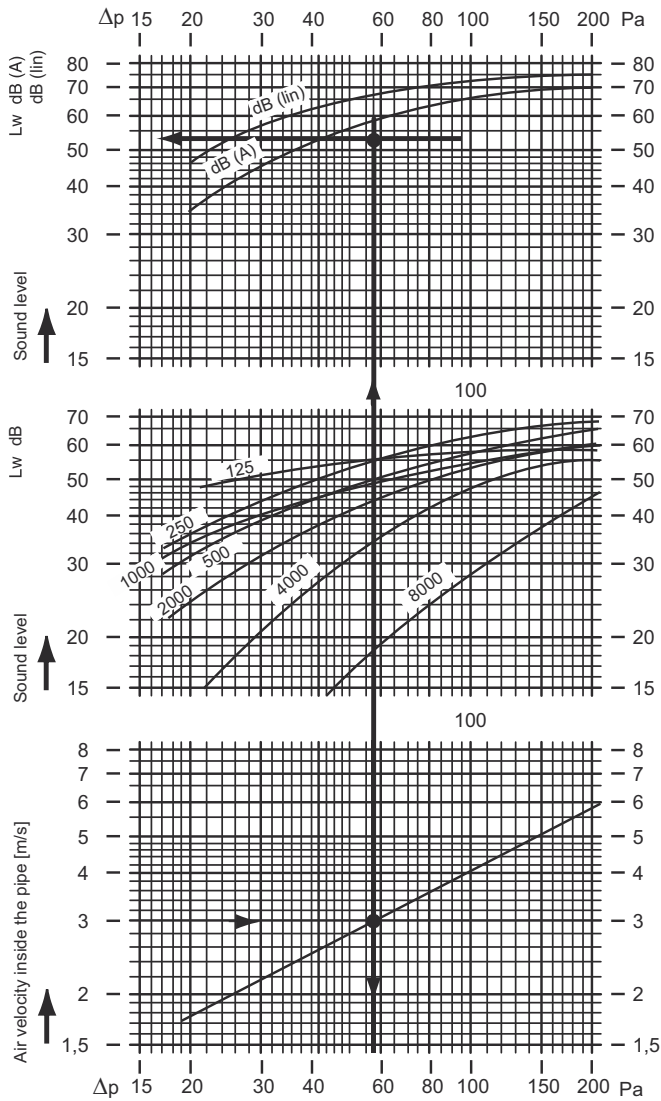


## TECHNICAL DATA FOR THE SUCTION SIDE

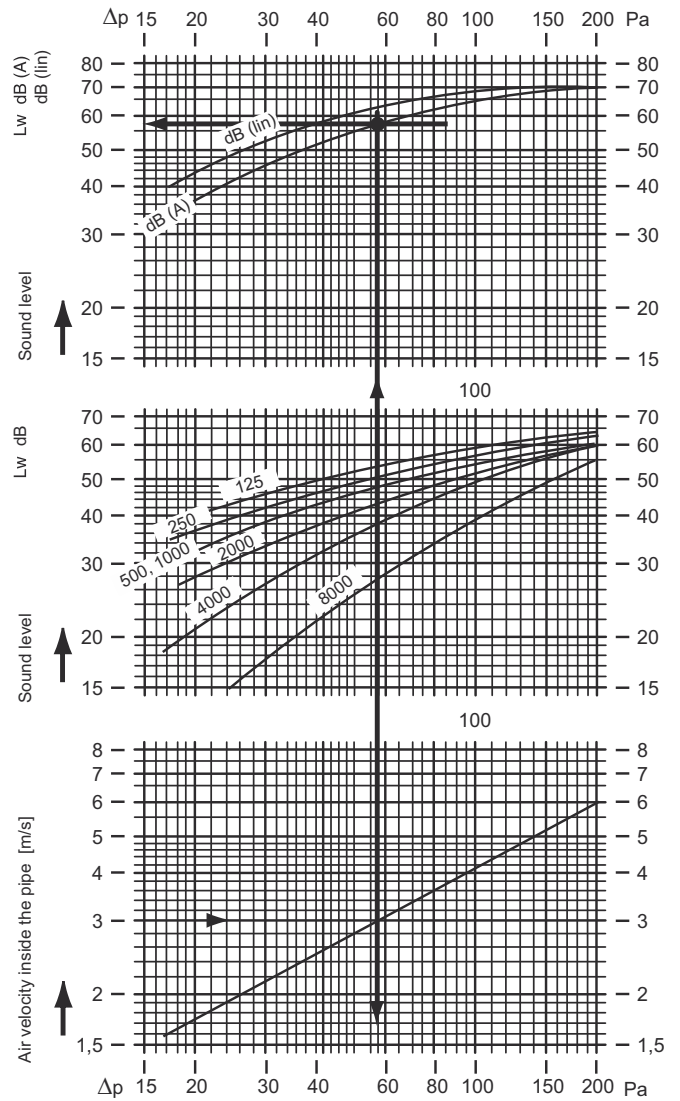

### SURFACE CORRECTION

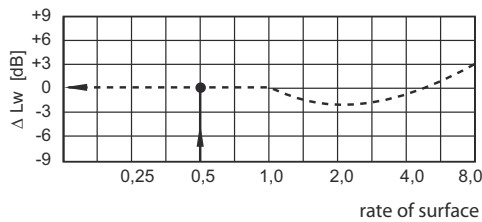

### SURFACE CORRECTION

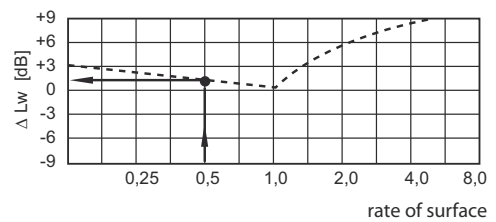

Distribution:



**STAVOKLIMA s.r.o.**

Budějovická 450, 37001 Homole • ČESKÉ BUDĚJOVICE

tel.: +420 387 428 990, +420 387 438 912

fax: +420 387 423 610

e-mail: info@stavoklima.cz

[www.stavoklima.eu](http://www.stavoklima.eu)